


# WALL LINE SLIM

Wall Mounted Lighting

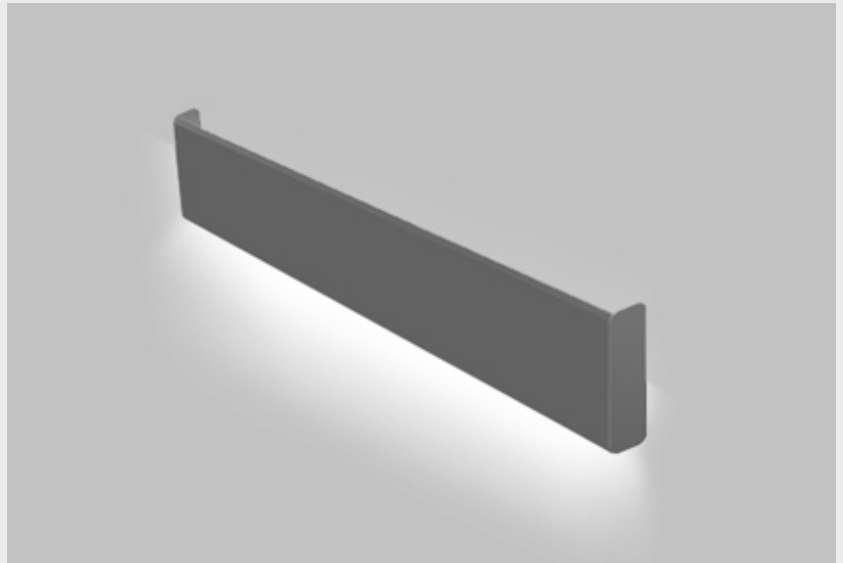

**With the straight lines and robust design of WALL LINE, we have made a clear design statement which gives its soft light an exceedingly stylish frame.**

The light source cannot be seen directly, and so the lighting is pleasantly reflected with the soft design. The symmetrical light distribution creates harmonious illumination. The light falls from above into the glassless.

## Characteristics

- Aluminium Injection Body
- Electrostatic Powder Paint
- Optional RAL Colors
- Extra Clear 5mm Tempered Glass
- Aluminium PCB
- LED with Life Span >100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)


## Key Advantages

- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Interesting light sculpture
- UV Resistan Diffuser
- Modern Design

## Applications



# WALL LINE SLIM

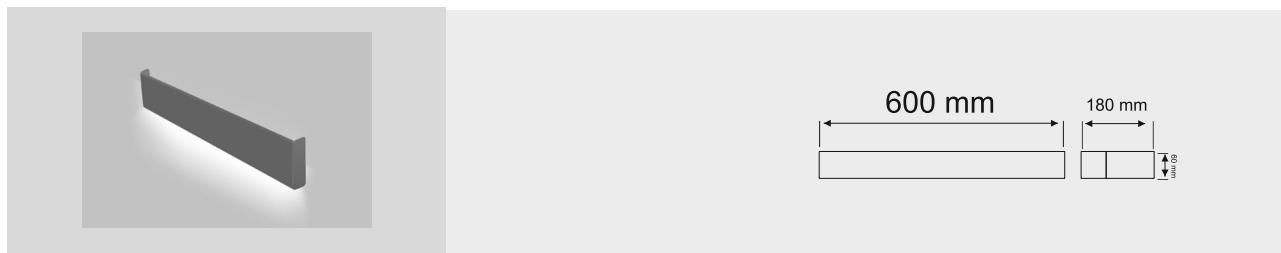


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	2kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years


## Light Colors



## Ordering Details

Product Code	Power	Light Color	Lumen
WALL.S.10.AC.N.4.120.9005	10W	4000K	2x1770
WALL.S.15.AC.N.4.120.9005	15W	4000K	2x1770

## Body Colors Options

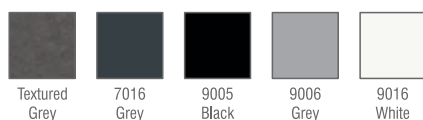

## Beam Angle Options



## Product Coding

Product Name		Product Power		Input		Control System				Color Temperature			Light Beam	Body Color
XX	XX	AC	DC	on/off	I-Low	PUSH	TRIAC	DALI	3K	4K	6.5K	XX	XX	
XX	XX	AC	DC	N	V	P	T	D	3	4	6	XX	XX	