


# BETA

Single - One Way  
Surface / Wall Mounted Lights

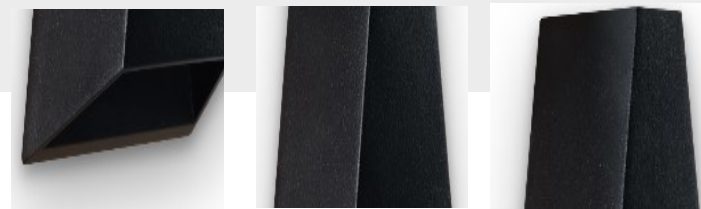

**Beta combines an elegant shape to radial optics specially designed to ensure the best lighting performance, producing different light effects based on the screen type.**

Understated and yet remarkably beautiful, **Beta** is a prime example of the efficient power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly flawless cylindrical form.

Various lumen packages and configurations make these highly adaptable LED outdoor luminaires even more flexible.

## Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Diffuser Glass

Aluminium PCB

LED with Life Span >100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- Flexible Wall Light
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- UV Resistant Diffuser

## Applications



Exterior



Facade




Architectural



Ancient

# BETA

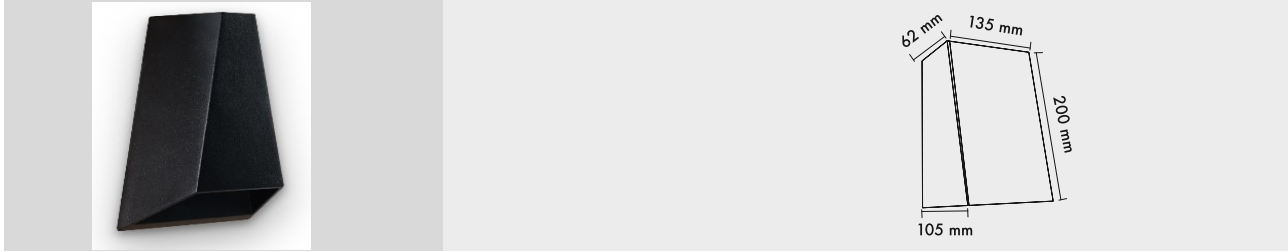


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	Symmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

## Light Colors



## Body Colors Options

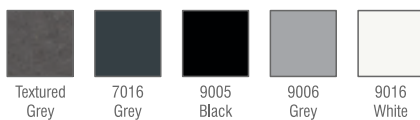

## Ordering Details - One Sided

Product Code	Power	Light Color	Lumen
<b>BETA.SINGLE.3.AC.N.4</b>	<b>3</b>	<b>4000K</b>	<b>290</b>
<b>BETA.SINGLE.4.AC.N.4</b>	<b>4</b>	<b>4000K</b>	<b>380</b>
<b>BETA.SINGLE.5.AC.N.4</b>	<b>5</b>	<b>4000K</b>	<b>475</b>

## Ordering Details - Double Sided

Product Code	Power	Light Color	Lumen
<b>BETA.DOUBLE.2.AC.N.4</b>	<b>2x1</b>	<b>4000K</b>	<b>190x2</b>
<b>BETA.DOUBLE.2.AC.N.4</b>	<b>2x2</b>	<b>4000K</b>	<b>380x2</b>
<b>BETA.DOUBLE.2.AC.N.4</b>	<b>2x3</b>	<b>4000K</b>	<b>570x2</b>

\* For different options, please contact our team.

## Light Effect



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX