

# ROSH V1

Outdoor type  
LED Lighting Pole



**A family of bollards and applique characterized by the balance between sculptural form and lighting technology.**

The collection is very wide, with different lighting options. Besides lighting the surrounding environment, the light plays with the lamp-object by revealing and enhancing the volumes. Rosh V1, in all its varieties, is an aesthetically pleasing object also when switched-off, thanks to its design that interacts with daylight, creating shadows and visual softness. The applique is designed to allow a double emission with diffused optic.

## Characteristics

Die-cast aluminium body
Extruded pole
High efficiency LED lighting
Electrostatic powder paint
High quality silicon gasket
Galvanized metal anchorage
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

## Key Advantages

- Simple for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Applications



Landscape




Outdoor



Urban

# ROSH V1

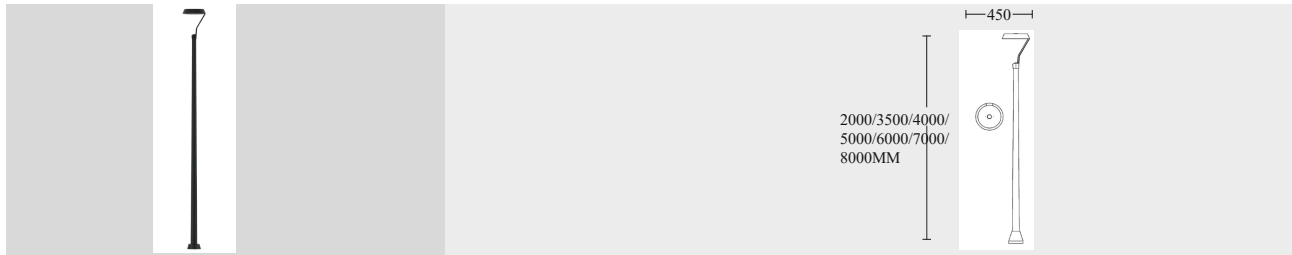


## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years

## Light Colors



## Body Colors Options



## Light Effect

SYMMETRIC / ASYMMETRIC



## Optional Accessories



IP67  
Junction  
Box

## Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
ROSHV1.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4550
ROSHV1.60.3500.AC.N.4.SYM.7016	60W	4000K	3500mm	7800
ROSHV1.70.4000.AC.N.4.SYM.7016	70W	4000K	4000mm	9100
ROSHV1.85.5000.AC.N.4.SYM.7016	85W	4000K	5000mm	11050
ROSHV1.105.6000.AC.N.4.SYM.7016	105W	4000K	6000mm	13650
ROSHV1.120.7000.AC.N.4.SYM.7016	120W	4000K	7000mm	15600
ROSHV1.140.8000.AC.N.4.SYM.7016	140W	4000K	8000mm	16800

\* For different options, please contact our team.



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX