

ROSH V2

Outdoor type
LED Lighting Pole



A family of bollards and applique characterized by the balance between sculptural form and lighting technology.

The collection is very wide, with different lighting options. Besides lighting the surrounding environment, the light plays with the lamp-object by revealing and enhancing the volumes. ROSH V2, in all its varieties, is an aesthetically pleasing object also when switched-off, thanks to its design that interacts with daylight, creating shadows and visual softness. The applique is designed to allow a double emission with diffused optic.

Key Advantages

- Simple for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Characteristics

Aluminium body
Galvanised steel pole
4mm tempered glass diffuser
High efficiency LED lighting
Electrostatic powder paint
High quality silicon gasket
Galvanized metal anchorage
LED with Life Span >100.000 Hours
Corrosion Protection
CCT tolerance within a 3 step MacAdams ellipse
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Applications




Landscape

Outdoor

Urban

ROSH V2

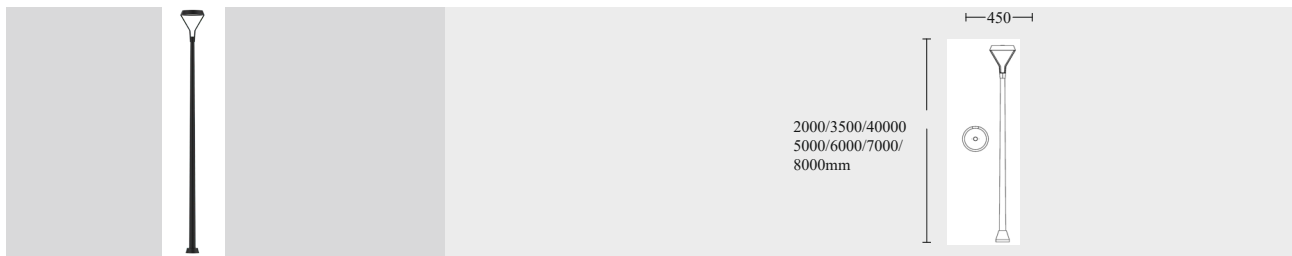


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years

Light Colors




Body Colors Options

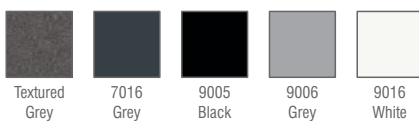

Light Effect

SYMMETRIC



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
ROSHV2.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4550
ROSHV2.60.3500.AC.N.4.SYM.7016	60W	4000K	3500mm	7800
ROSHV2.70.4000.AC.N.4.SYM.7016	70W	4000K	4000mm	9100
ROSHV2.85.5000.AC.N.4.SYM.7016	85W	4000K	5000mm	11050
ROSHV2.105.6000.AC.N.4.SYM.7016	105W	4000K	6000mm	13650
ROSHV2.120.7000.AC.N.4.SYM.7016	120W	4000K	7000mm	15600
ROSHV2.140.8000.AC.N.4.SYM.7016	140W	4000K	8000mm	16800

* For different options, please contact our team.



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX