

SATIN LINE is a linear LED fixture for facades and creative installations. Continuous interconnection with IP68 connectors Mounting bracket made of Stainless steel.

Aluminium extruded body and polyurethane based epoxy covering the electronics inside the luminaire so that the luminaire meets IP68 enclosure ratings Satin Line pixel can be fully customized in terms of lengths to match every installations types and measurements.





SATIN LINE UP& DOWN

LED BAR
Surface mounted



LK] SMY Z^SY X]

Light source color	3000K-4000K-6500K
Control interface	On/Off
Protection class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
Input Voltage	24V/ DC
LM80	>54 000 Hours
MacAdams	3 step MacAdams
Wind Catching Area	0.13 m ²
Power Factor (Min)	0.95
Ambient temperature	-25°C to +60°C

Y Z^SM]

Light source	Power LED on Alum PCB
Luminous Efficiency	137lm/W
Color Rendering Index	CRI>80

CUSTOMIZED OPTIONS

LED Color	RED-GREEN-BLUE-AMBER
Connectors	IP 68 Conectors
Light source	Mid Power LED on Alum PCB
Diffuser	Opaque Diffuser
Control System	Dynamic White- RGB- RGBW

ELECTRICAL OPTIONS

Input Voltage	24V/ DC
Input Frequency	DC

LY Nc^Y Z^SY X]

Housing	Extruded Extrusion
Gasket	Silicone
Protection rating	IP 68
Impact resistance	IK10
Diffusor	Clear transparent
Screws	316 stainless steel
End Caps	Aluminium Extrusion
Weight	316 stainless steel

CONNECTION

Connection Cable	30cm- 3x1.5 mm ²
------------------	-----------------------------



ORDERING DETAILS


PRODUCT CODE	W	Length	Temp	Lumen*
SATINLINEUD.40.DC.N.4	2x20W	1000mm	4000K	5500Lm

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIM	DAU	4K	3K	6.5K	▲
XX	XX	XX	N	V	P	T	D	3	4	6	XX

Technical Drawing

DUVAR

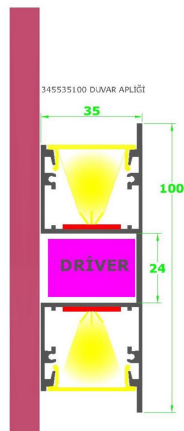

Connection Diagram

