



# WALL LIGHT DUAL MAG

Magnetic type Walllight



- Aluminium body
- Aluminium extrusion heatsink
- Electrostatic powder coating paint
- High performance LED
- Opal pmma diffuser
- Optional body colors
- ENEC standards



## BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 24V - 48V DC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 15°, 30°, 45°
🌡️	Operating Temperature : -20 / +40 °C
B	Black Body Color

## PRODUCT CODE

PRODUCT CODE	W	Lengt	Temp	Lumen*
WALLDUALMAG.15.320.N.4.120	15	320	4000K	1500
WALLDUALMAG.20.320.N.4.120	20	320	4000K	2000

\* According to 4000K light temperature



## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI >90	W

## PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature				Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	2	3	4	5	XX
XX	XX	XX	N	V	P	T	D	2	3	4	5	XX

## TECHNICAL DRAWINGS

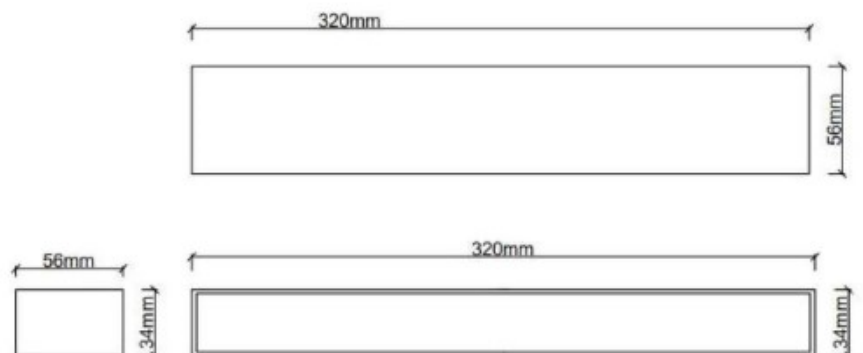

\* For different options, please contact our team.