




BOW

Outdoor type
LED Lighting Pole



A family of pole light and applique characterized by the balance between sculptural form and lighting technology.

The collection is very wide, with different lighting options. Besides lighting the surrounding environment, the light plays with the lamp-object by revealing and enhancing the volumes. BOW, in all its varieties, is an aesthetically pleasing object also when switched-off, thanks to its design that interacts with daylight, creating shadows and visual softness. The applique is designed to allow a double emission with diffused optic.

Characteristics

- Aluminium body
- High efficiency LED lighting
- Electrostatic powder paint
- High quality silicon gasket
- Galvanized metal anchorage
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection
- 5 Years Warranty
- Marine Coating (Optional)
- ENEC Certified Driver

Key Advantages

- Simple for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Landscape



Outdoor



Urban


BOW




Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Light Colors




Body Colors Options

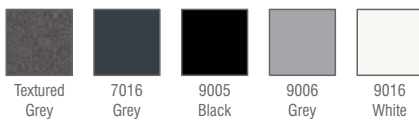

Light Effect

SYMMETRIC



Optional Accessories



IP67
Junction
Box

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
BOW.70.4000.AC.N.4.SYM.7016	70W	4000K	4000mm	9100
BOW.85.5000.AC.N.4.SYM.7016	85W	4000K	5000mm	11050
BOW.105.6000.AC.N.4.SYM.7016	105W	4000K	6000mm	13650
BOW.125.8000.AC.N.4.SYM.7016	125W	4000K	8000mm	16250

* For different options, please contact our team.



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX