

# ARES SURFACE

Surface type  
downlight



Aluminum injection body,  
UV protected diffuser,  
Opal Polystyren/PMMA (Fire-Proof) /  
Microprismatic(3D) Diffuser Types,  
Constant current LED driver,  
Electrostatic powder coating paint,  
Optional body colors, ENEC Standards



| PRODUCT CODE               | W  | Height | Lenght | Temp  | Lumen* |
|----------------------------|----|--------|--------|-------|--------|
| ARESSURFACE.10.200.N.4.100 | 10 | 120    | Ø200   | 4000K | 1150   |
| ARESSURFACE.15.200.N.4.100 | 15 | 120    | Ø200   | 4000K | 1725   |
| ARESSURFACE.21.200.N.4.100 | 21 | 120    | Ø200   | 4000K | 2415   |

\* According to 4000K light temperature

## BASIC OPTIONS

- on/off on/off Control (No Dimmable)
- 230V AC Input Voltage 230V/AC Color
- CRI >80 Rendering Index >80 Light
- 4K Temperature 4000K Light
- Beam 100°
- White Polystyren Diffuser
- w White Body Color



## PRODUCT CODING

| Product Name | Product Power | Product Size | Control System |       |      |       | Color Temperature |    |    | Light Beam |    |
|--------------|---------------|--------------|----------------|-------|------|-------|-------------------|----|----|------------|----|
| XX           | XX            | XX           | on/off         | 1-10V | PUSH | TRIAC | DALI              | 3K | 4K | 6.5K       | XX |

## CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC Light
- Temperature 3000K Light
- Temperature 6500K
- Dynamic White
- Color Rendering Index >90
- Transparent Diffuser

## TECHNICAL DRAWINGS

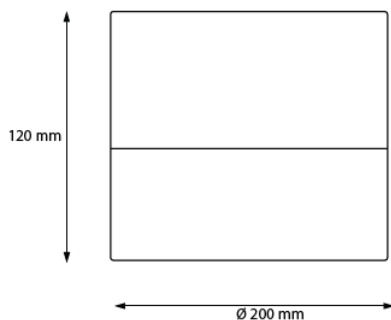

\* For different options, please contact our team.