

AVENUE SURFACE

Surface type
downlight



Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic(3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors, ENEC Standards



PRODUCT CODE	W	Height	Lenght	Temp	Lumen*
AVENUESURFACE.10.240.N.4.100	10	66	Ø240	4000K	1150
AVENUESURFACE.15.240.N.4.100	15	66	Ø240	4000K	1725
AVENUESURFACE.20.240.N.4.100	20	66	Ø240	4000K	2300
AVENUESURFACE.25.240.N.4.100	25	66	Ø240	4000K	2875
AVENUESURFACE.30.240.N.4.100	30	66	Ø240	4000K	3450

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC Color
CRI >80	Rendering Index >80 Light
4K	Temperature 4000K Light
▲	Beam 100°
●	White Polystyren Diffuser
w	White Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX	XX	XX	N	V	P	T	D	3	4	6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC Light	Temperature 3000K Light	Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	○

TECHNICAL DRAWINGS

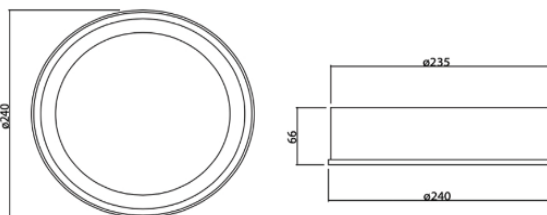

* For different options, please contact our team.