




# COSMO DUO SQUARE

recessed type  
downlight



- Aluminum injection body
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



## BASIC OPTIONS

|          |                              |
|----------|------------------------------|
| on/off   | on/off Control (No Dimmable) |
| 230V AC  | Input Voltage 230V/AC        |
| CRI > 80 | Color Rendering Index > 80   |
| 4K       | Light Temperature 4000K      |
|          | Light Beam 23°, 37°, 51°     |
| w        | White Body Color             |

| PRODUCT CODE              | W  | Height | Length  | Hole Size | Temp  | Lumen* |
|---------------------------|----|--------|---------|-----------|-------|--------|
| CSMO2SQ.14.117x234.N.4.23 | 14 | 65     | 117x234 | 105+105   | 4000K | 1540   |
| CSMO2SQ.14.117x234.N.4.37 | 14 | 65     | 117x234 | 105+105   | 4000K | 1520   |
| CSMO2SQ.14.117x234.N.4.51 | 14 | 65     | 117x234 | 105+105   | 4000K | 1500   |
| CSMO2SQ.20.117x234.N.4.23 | 20 | 65     | 117x234 | 105+105   | 4000K | 2140   |
| CSMO2SQ.20.117x234.N.4.37 | 20 | 65     | 117x234 | 105+105   | 4000K | 2120   |
| CSMO2SQ.20.117x234.N.4.51 | 20 | 65     | 117x234 | 105+105   | 4000K | 2100   |
| CSMO2SQ.26.117x234.N.4.23 | 26 | 65     | 117x234 | 105+105   | 4000K | 2522   |
| CSMO2SQ.26.117x234.N.4.37 | 26 | 65     | 117x234 | 105+105   | 4000K | 2500   |
| CSMO2SQ.26.117x234.N.4.51 | 26 | 65     | 117x234 | 105+105   | 4000K | 2480   |


\* According to 4000K light temperature

## CUSTOMIZE OPTIONS


|                |               |                |               |                      |                         |                         |               |                            |                  |               |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Black Body Color | EMERGENCY KIT |
| 1-10V          | PUSH          | TRIAC          | DALI          | 24V DC               | 3K                      | 6.5K                    | DYN           | CRI > 90                   | B                | G             |

## PRODUCT CODING

|              |               |              |                |      |       |      |    |                   |      |   |            |
|--------------|---------------|--------------|----------------|------|-------|------|----|-------------------|------|---|------------|
| Product Name | Product Power | Product Size | Control System |      |       |      |    | Color Temperature |      |   | Light Beam |
| XX           | XX            | XX           | 1-10V          | PUSH | TRIAC | DALI | 3K | 4K                | 6.5K |   |            |
| XX           | XX            | XX           | N              | V    | P     | T    | D  | 3                 | 4    | 6 | XX         |

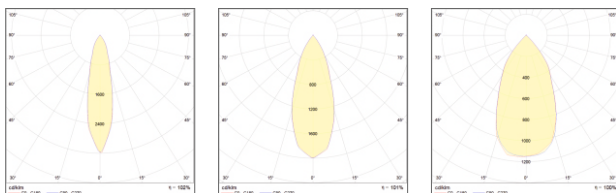

## TECHNICAL DRAWINGS

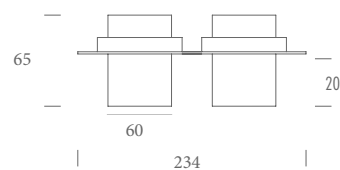

\* For different options, please contact our team.