


LED surface type



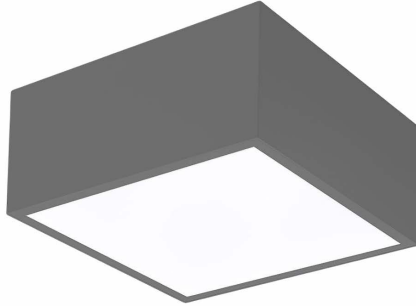

DKP sheet metal body  
Electrostatic coated  
UV protected diffuser  
Constant current LED driver  
Electrostatic powder coating paint  
Optional body colors  
ENEC Standards

Made in TURKEY



## BASIC OPTIONS


on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
°C	-20°C/+40°C Temperature


## PRODUCT CODE

PRODUCT CODE	W	Lenght	Temp	Lumen*
PLATSQ.5.600.N.4.120	5	200	4000K	600
PLATSQ.10.600.N.4.120	10	200	4000K	1200
PLATSQ.15.600.N.4.120	15	200	4000K	1800
PLATSQ.20.600.N.4.120	20	200	4000K	2400


\* According to 4000K light temperature

## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90		W	E



## PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	
XX	XX	XX	N V P T D	3 4 6	XX

## TECHNICAL DRAWINGS



\* For different options, please contact our team.