

STAGE^{V3}

Outdoor Type Decorative Lighting Poles







The elegant sobriety of STAGE^{V3}, combined with state-of-the-art lighting technology, ensures its over-average versatility. It can easily be integrated in just about any architectural environment and fulfils every requirement - lighting paths in compliance with safety standards, used in a row, as design-oriented decorative lighting or as a standard guidance system.

Various light distributions, lumen packages, sizes and configurations make these highly adaptable LED outdoor luminaires even more .elbixeff Depending on personal taste and the area of installation, STAGE^{V3} can be used as pole-top luminaire. When the optional luminaire is added to the latter, it produces a symbolic, almost archetypal effect without loosing its characteristically modern simplicity.

Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

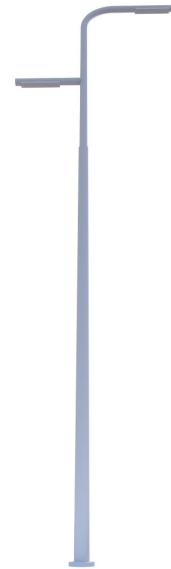

Key Advantages

- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Landscape




Outdoor



Urban

STAGE^{V3}



* Possibility of production in different lengths and sections.


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years


Light Colors



Body Colors Options

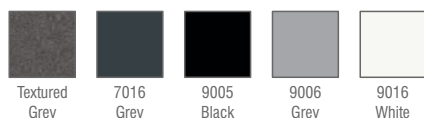

Light Effect



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Height	Dia	Lumen
STAGE.V3-T1.14.1.350.N.ST.G	14W	4000K	3000	Ø89	1848
STAGE.V3-T1.27.1.700.N.ST.G	27W	4000K	3000	Ø89	3564
STAGE.V3-T1.41.3.350.N.ST.G	41W	4000K	4000	Ø89	5412
STAGE.V3-T1.56.2.700.N.ST.G	56W	4000K	4000	Ø89	7392
STAGE.V3-T1.59.3.500.N.ST.G	59W	4000K	5000	Ø114	7788
STAGE.V3-T1.84.3.700.N.ST.G	84W	4000K	6000	Ø114	11088
STAGE.V3-T1.14.1.350.N.ST.G	14W	4000K	3000	Ø89	1848
STAGE.V3-T1.27.1.700.N.ST.G	27W	4000K	3000	Ø89	3564
STAGE.V3-T1.41.3.350.N.ST.G	41W	4000K	4000	Ø89	5412
STAGE.V3-T1.56.2.700.N.ST.G	56W	4000K	4000	Ø89	7392
STAGE.V3-T1.59.3.500.N.ST.G	59W	4000K	5000	Ø114	7788
STAGE.V3-T1.84.3.700.N.ST.G	84W	4000K	6000	Ø114	11088
STAGE.V3-T2.28.1.350.N.ST.G	28W	4000K	3000	Ø89	3696
STAGE.V3-T2.54.1.700.N.ST.G	54W	4000K	3000	Ø89	7128
STAGE.V3-T2.82.3.350.N.ST.G	82W	4000K	4000	Ø89	10824
STAGE.V3-T2.112.2.700.N.ST.G	112W	4000K	4000	Ø89	14784
STAGE.V3-T2.118.3.500.N.ST.G	118W	4000K	5000	Ø114	15576
STAGE.V3-T2.168.3.700.N.ST.G	168W	4000K	6000	Ø114	22176
STAGE.V3-T2.28.1.350.N.ST.G	28W	4000K	3000	Ø89	3696
STAGE.V3-T2.54.1.700.N.ST.G	54W	4000K	3000	Ø89	7128
STAGE.V3-T2.82.3.350.N.ST.G	82W	4000K	4000	Ø89	10824
STAGE.V3-T2.112.2.700.N.ST.G	112W	4000K	4000	Ø89	14784
STAGE.V3-T2.118.3.500.N.ST.G	118W	4000K	5000	Ø114	15576
STAGE.V3-T2.168.3.700.N.ST.G	168W	4000K	6000	Ø114	22176
STAGE.V3-T2.118.3.500.N.ST.G	118W	4000K	8000	Ø139	15576
STAGE.V3-T2.168.3.700.N.ST.G	168W	4000K	9000	Ø139	22176



* For different options, please contact our team.

Product Coding

Product Name	Product Power	Module Pcs	Current	Product Height	Control System	Color Temperature	Light Beam	Body Color
XX	XX	XX	XX	XX	on/off SMART	3K 4K 5K 6.5K	XX	XX
XX	XX	XX	XX	XX	N S	3 4 5 6	XX	XX

www.hb-lux.com