


# APOLLO S ROUND

Outdoor type  
LED Bollard Lighting

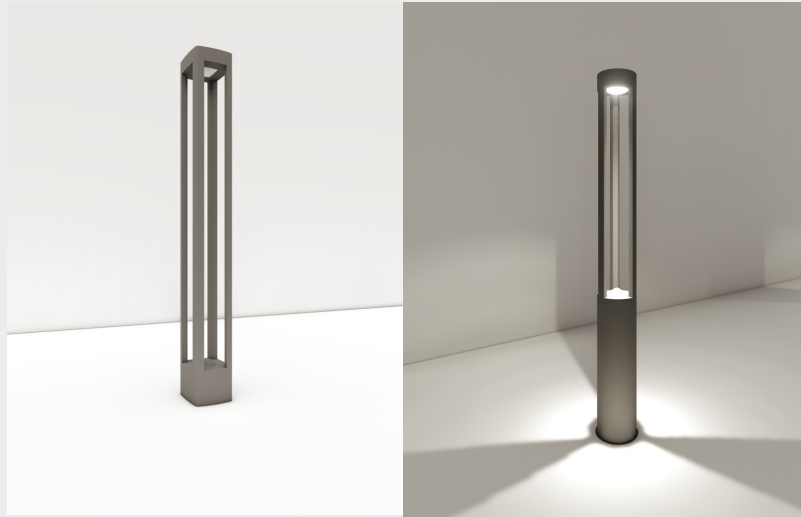

Apollo S Round's soft light cone creates strikingly beautiful light patterns and reveals stylistic hcihwfi nesse,bewitches both owner and spectator. Thanks to Apollo Round, stone comes to life and buildings can tell stories. This almost magic effect is due to a very pragmatic approach, namely that extraordinary performance creates extraordinary effects.

The housing made of powder-coated, corrosion-free aluminium forms a uniform and integrated whole, and features a high-quality nifinishmetallic colours.

## Key Advantages

- Flawless cylindrical form
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Characteristics

---

Aluminium body

---

High efficiency LED lighting

---

Electrostatic powder paint

---

High quality silicone gasket

---

Galvanized metal anchorage

---

LED with Life Span > 100.000 Hours

---

CCT tolerance within a 3 step MacAdams ellipse

---

Corrosion Protection

---

Aluminium PCB

---

5 Years Warranty

---

Marine Coating (Optional)

---

ENEC CerrevirD defiiit

---


Diffuser transparent or opaque

---

## Applications




# APOLLO S ROUND

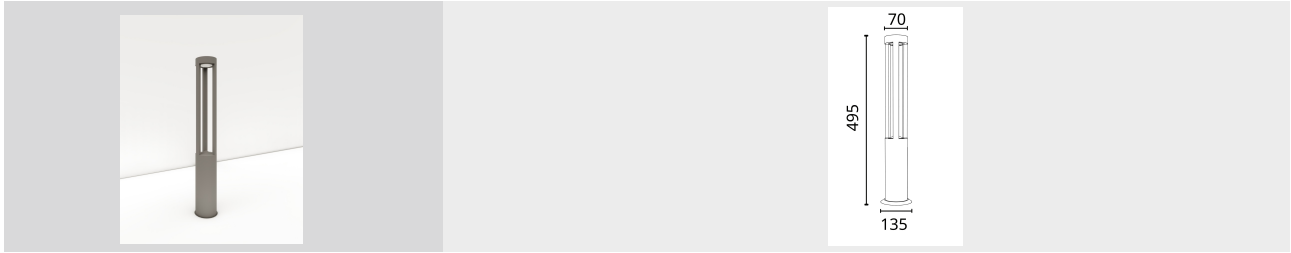


## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

## Light Colors



## Body Colors Options



## Light Effect



## Optional Accessories



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	ON/OFF 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX

## Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque

## Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
APOLLO.S.ROUND105.8.600.AC.N.4.SYM.7016	8W	4000K	Ø105mm H600mm	1056
APOLLO.S.ROUND105.10.600.AC.N.4.SYM.7016	10W	4000K	Ø105mm H600mm	1320
APOLLO.S.ROUND105.15.800.AC.N.4.SYM.7016	15W	4000K	Ø105mm H800mm	1980
APOLLO.S.ROUND105.20.800.AC.N.4.SYM.7016	20W	4000K	Ø105mm H800mm	2640
APOLLO.S.ROUND105.25.1000.AC.N.4.SYM.7016	25W	4000K	Ø105mm H1000mm	3300
APOLLO.S.ROUND105.30.1000.AC.N.4.SYM.7016	30W	4000K	Ø105mm H1000mm	3960
APOLLO.S.ROUND105.25.1500.AC.N.4.SYM.7016	25W	4000K	Ø105mm H1500mm	3300
APOLLO.S.ROUND105.30.1500.AC.N.4.SYM.7016	30W	4000K	Ø105mm H1500mm	3960
APOLLO.S.ROUND105.35.2000.AC.N.4.SYM.7016	35W	4000K	Ø105mm H2000mm	4620
APOLLO.S.ROUND105.40.2000.AC.N.4.SYM.7016	40W	4000K	Ø105mm H2000mm	5280
APOLLO.S.ROUND120.8.600.AC.N.4.SYM.7016	8W	4000K	Ø120mm H600mm	1056
APOLLO.S.ROUND120.10.600.AC.N.4.SYM.7016	10W	4000K	Ø120mm H600mm	1320
APOLLO.S.ROUND120.15.800.AC.N.4.SYM.7016	15W	4000K	Ø120mm H800mm	1980
APOLLO.S.ROUND120.20.800.AC.N.4.SYM.7016	20W	4000K	Ø120mm H800mm	2640
APOLLO.S.ROUND120.25.1000.AC.N.4.SYM.7016	25W	4000K	Ø120mm H1000mm	3300
APOLLO.S.ROUND.120.30.1000.AC.N.4.SYM.7016	30W	4000K	Ø120mm H1000mm	3960
APOLLO.S.ROUND.120.25.1500.AC.N.4.SYM.7016	25W	4000K	Ø120mm H1500mm	3300
APOLLO.S.ROUND.120.30.1500.AC.N.4.SYM.7016	30W	4000K	Ø120mm H1500mm	3960
APOLLO.S.ROUND.120.35.2000.AC.N.4.SYM.7016	35W	4000K	Ø120mm H2000mm	4620
APOLLO.S.ROUND.120.40.2000.AC.N.4.SYM.7016	40W	4000K	Ø120mm H2000mm	5280
APOLLO.S.ROUND.150.8.600.AC.N.4.SYM.7016	8W	4000K	Ø150mm H600mm	1056
APOLLO.S.ROUND.150.10.600.AC.N.4.SYM.7016	10W	4000K	Ø150mm H600mm	1320
APOLLO.S.ROUND.150.15.800.AC.N.4.SYM.7016	15W	4000K	Ø150mm H800mm	1980
APOLLO.S.ROUND.150.20.800.AC.N.4.SYM.7016	20W	4000K	Ø150mm H800mm	2640
APOLLO.S.ROUND.150.25.1000.AC.N.4.SYM.7016	25W	4000K	Ø150mm H1000mm	3300
APOLLO.S.ROUND.150.30.1000.AC.N.4.SYM.7016	30W	4000K	Ø150mm H1000mm	3960
APOLLO.S.ROUND.150.25.1500.AC.N.4.SYM.7016	25W	4000K	Ø150mm H1500mm	3300
APOLLO.S.ROUND.150.30.1500.AC.N.4.SYM.7016	30W	4000K	Ø150mm H1500mm	3960
APOLLO.S.ROUND.150.35.2000.AC.N.4.SYM.7016	35W	4000K	Ø150mm H2000mm	4620
APOLLO.S.ROUND.150.40.2000.AC.N.4.SYM.7016	40W	4000K	Ø150mm H2000mm	5280
APOLLO.S.ROUND.200.8.600.AC.N.4.SYM.7016	8W	4000K	Ø200mm H600mm	1056
APOLLO.S.ROUND.200.10.600.AC.N.4.SYM.7016	10W	4000K	Ø200mm H600mm	1320
APOLLO.S.ROUND.200.15.800.AC.N.4.SYM.7016	15W	4000K	Ø200mm H800mm	1980
APOLLO.S.ROUND.200.20.800.AC.N.4.SYM.7016	20W	4000K	Ø200mm H800mm	2640
APOLLO.S.ROUND.200.25.1000.AC.N.4.SYM.7016	25W	4000K	Ø200mm H1000mm	3300
APOLLO.S.ROUND.200.30.1000.AC.N.4.SYM.7016	30W	4000K	Ø200mm H1000mm	3960
APOLLO.S.ROUND.200.25.1500.AC.N.4.SYM.7016	25W	4000K	Ø200mm H1500mm	3300
APOLLO.S.ROUND.200.30.1500.AC.N.4.SYM.7016	30W	4000K	Ø200mm H1500mm	3960
APOLLO.S.ROUND.200.35.2000.AC.N.4.SYM.7016	35W	4000K	Ø200mm H2000mm	4620
APOLLO.S.ROUND.200.40.2000.AC.N.4.SYM.7016	40W	4000K	Ø200mm H2000mm	5280

\* For different options, please contact our team.