

# ELIAS

Outdoor Type Decorative Lighting Poles



**Urban lighting between versatility and high visual comfort. ELIAS is the pole top luminaire for urban lighting, featuring a catchy shape and excellent performance, also available with the latest lighting technologies.**

Wide range of optics, powers and color temperatures to meet any lighting project need. Featuring an elegant, timeless design, excellent performance and fort he latest lighting designs. Its diffused wide optic provides a homogeneous, pleasant lighting with high visual comfort and no glare.

## Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance
- High IP Protection
- Transparent or Diffused Head

## Characteristics

Electro Galvanized or Hot Dip Galvanized Steel
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

## Applications



Landscape





Outdoor



Urban

# ELIAS

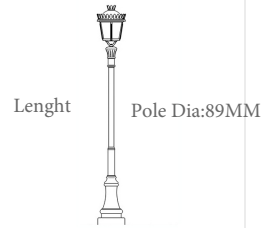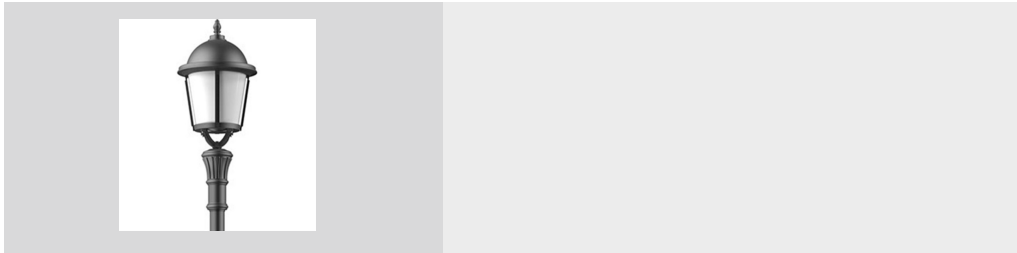


## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Head	Transparent Diffuser


## Available Options

*\* Possibility of production in different lengths and sections.*


Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years

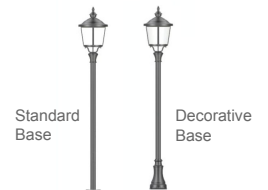


## Light Colors



## Body Colors Options

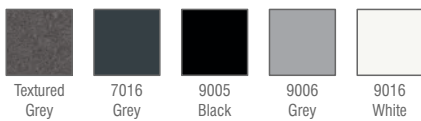

## Light Effect



## Optional Accessories



IP67  
Junction  
Box

## Ordering Details

Product Code	Power	Light Color	Lenght	Lumen
ELIAS.20.2000MM.TRANS.4.STBASE.N	20W	4000K	2000	2640
ELIAS.30.3000MM.TRANS.4.STBASE.N	30W	4000K	3000	3960
ELIAS.40.3000MM.TRANS.4.STBASE.N	40W	4000K	3000	5280
ELIAS.30.4000MM.TRANS.4.STBASE.N	30W	4000K	4000	3960
ELIAS.40.4000MM.TRANS.4.STBASE.N	40W	4000K	4000	5280
ELIAS.45.4000MM.TRANS.4.STBASE.N	45W	4000K	4000	5940
ELIAS.50.4000MM.TRANS.4.STBASE.N	50W	4000K	4000	6600
ELIAS.40.5000MM.TRANS.4.STBASE.N	40W	4000K	5000	5280
ELIAS.45.5000MM.TRANS.4.STBASE.N	45W	4000K	5000	5940
ELIAS.50.5000MM.TRANS.4.STBASE.N	50W	4000K	5000	6600
ELIAS.55.5000MM.TRANS.4.STBASE.N	55W	4000K	5000	7260
ELIAS.60.5000MM.TRANS.4.STBASE.N	60W	4000K	5000	7920
ELIAS.30.6000MM.TRANS.4.STBASE.N	30W	4000K	6000	3960
ELIAS.40.6000MM.TRANS.4.STBASE.N	40W	4000K	6000	5280
ELIAS.50.6000MM.TRANS.4.STBASE.N	50W	4000K	6000	6600
ELIAS.60.6000MM.TRANS.4.STBASE.N	60W	4000K	6000	7920
ELIAS.80.6000MM.TRANS.4.STBASE.N	80W	4000K	6000	10560

*\* For different options, please contact our team.*



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	push/T/RAC/DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX