

LED Linear Strip

Wall mounted ledbar fixture  
Aluminum extruded body

UV protected High homogenous light diffusion  
with high-quality diffuser

Aluminum mounting brackets

Production in different lengths


Daisy-chain connection,

up to 15 meters

IP67 I/O Connectors

ENEC Standarts

IP20 or IP65, IP67 Options

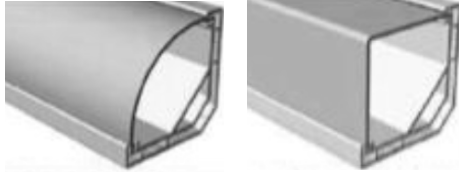



D1


D2



## BASIC OPTIONS

on/off	on/off Control (No Dimmable)
24V DC	Input Voltage 24V DC
CRI >80	Color Rendering Index >80
Temp	Light Temperature 4000K
	Light Beam 120°
	White OPAL Polycarbonate Diffuser
°C	-20°C/+60°C Temperature
R-G-B	Amber, Red, Green or Blue Mono Color

## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	RGB PWM SIGNAL WITH RC	Light Color RGBW	Dynamic White	Color Rendering Index >90	Transparent Diffuser	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	PMW	RGBW	DYN	CRI >90		E

## Optional Accessories




IP CONNECTOR




Socket

PRODUCT CODE	W/M	Lenght	LUMEN
SATINLINECORV1.7.1000.4.D1	7W/m	1000mm	910Lm
SATINLINECORV1.9.1000.4.D1	9.6W/m	1000mm	1248m
SATINLINECORV1.14.1000.4.D1	14W/m	1000mm	1820Lm


\* For different options, please contact our team.

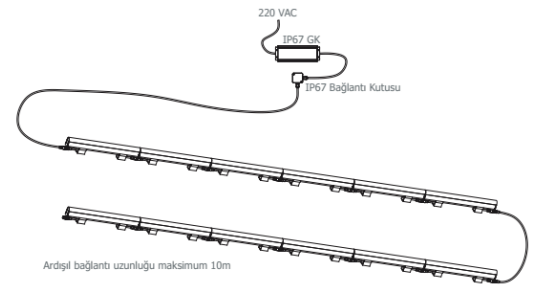

## TECHNICAL DRAWINGS



PROFILE



MOUNTING BRACKET