



LED Linear Strip  
Wall mounted ledbar fixture  
Aluminum extruded body  
UV protected High homogenous light diffusion  
with high-quality diffuser  
Aluminum mounting brackets  
Production in different lengths  
Daisy-chain connection,  
up to 15 meters  
IP67 I/O Connectors  
ENEC Standarts  
IP20 or IP65, IP67 Options




## BASIC OPTIONS

on/off	on/off Control (No Dimmable)
24V DC	Input Voltage 24V DC
CRI >80	Color Rendering Index >80
Temp	Light Temperature 4000K
	Light Beam 120°
	White OPAL Polycarbonate Diffuser
°C	-20°C/+60°C Temperature
R-G-B	Amber, Red, Green or Blue Mono Color

PRODUCT CODE	W/M	Lenght	LUMEN
SATINLINECORV2.7.1000.4.D2	7W/m	1000mm	910Lm
SATINLINECORV2.9.1000.4.D2	9.6W/m	1000mm	1248m
SATINLINECORV2.14.1000.4.D2	14W/m	1000mm	1820Lm

## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	RGB PWM SIGNAL WITH RC	Light Color RGBW	Dynamic White	Color Rendering Index >90	Transparent Diffuser	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	PMW	RGBW	DYN	CRI >90		E

## Optional Accessories




IP CONNECTOR



Socket

\* For different options, please contact our team.

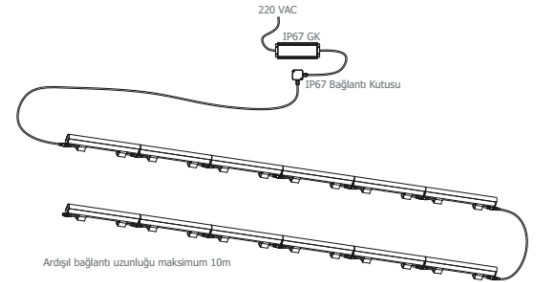

## TECHNICAL DRAWINGS

