

STEELO V2

Outdoor Type

Decorative Lighting Poles



Solidity and resistance combined to an elegant design with straight lines give life to this innovative luminaire for urban and public lighting. STEELO is provided with a diffused and adjustable optic that guarantees a homogeneous and comfortable lighting while producing a well-directed beam, which is perfect for street lighting, without producing light pollution.

It is available for pole installation in different module numbers. Light, multifunction and design - three elements that we have brought together in a unique lighting system. With these three criteria: light, multifunction and design creates a high quality of life and stay there, and a pleasant atmosphere.

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance
- Adjustable Heads
- Multiple Heads


Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Applications




STEELO V2

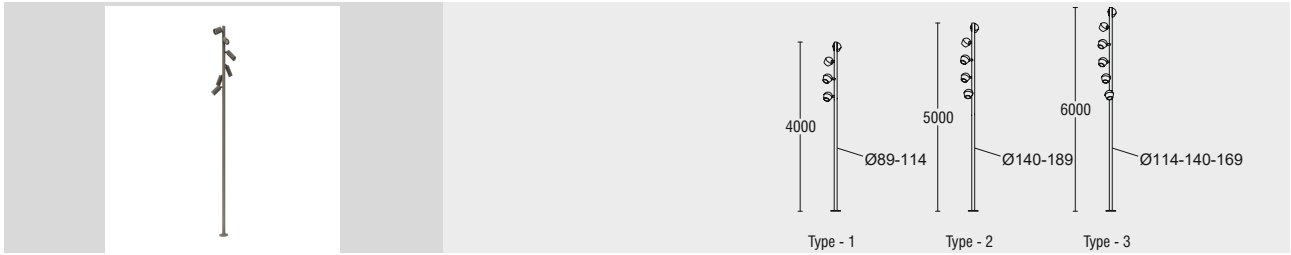


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP67
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Light Colors



Body Colors Options

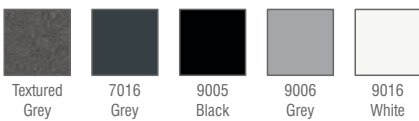

Light Effect



Optional Accessories



IP67
Junction
Box

Available Options

* Possibility of production in different lengths and sections.

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
STEELOV2.5.AC.N.4.7016	1x5W	4000K	4000	600
STEELOV2.10.AC.N.4.7016	2x5W	4000K	4000	1200
STEELOV2.20.AC.N.4.7016	2x10W	4000K	4000	2400
STEELOV2.15.AC.N.4.7016	3x5W	4000K	4000	1800
STEELOV2.30.AC.N.4.7016	3x10W	4000K	4000	3600
STEELOV2.5.AC.N.4.7016	1x5W	4000K	5000	600
STEELOV2.10.AC.N.4.7016	2x5W	4000K	5000	1200
STEELOV2.20.AC.N.4.7016	2x10W	4000K	5000	2400
STEELOV2.15.AC.N.4.7016	3x5W	4000K	5000	1800
STEELOV2.30.AC.N.4.7016	3x10W	4000K	5000	3600
STEELOV2.15.AC.N.4.7016	1x15W	4000K	5000	1800
STEELOV2.30.AC.N.4.7016	2x15W	4000K	5000	3600
STEELOV2.45.AC.N.4.7016	3x15W	4000K	5000	5400
STEELOV2.60.AC.N.4.7016	4x15W	4000K	5000	7200
STEELOV2.40.AC.N.4.7016	4x10W	4000K	5000	4800
STEELOV2.5.AC.N.4.7016	1x5W	4000K	6000	600
STEELOV2.10.AC.N.4.7016	2x5W	4000K	6000	1200
STEELO V2.20.AC.N.4.7016	2x10W	4000K	6000	2400
STEELO.V2 15.AC.N.4.7016	3x5W	4000K	6000	1800
STEELOV2.30.AC.N.4.7016	3x10W	4000K	6000	3600
STEELOV2.15.AC.N.4.7016	1x15W	4000K	6000	1800
STEELOV2.30.AC.N.4.7016	2x15W	4000K	6000	3600
STEELOV2.45.AC.N.4.7016	3x15W	4000K	6000	5400
STEELOV2.60.AC.N.4.7016	4x15W	4000K	6000	7200
STEELOV2.40.AC.N.4.7016	4x10W	4000K	6000	4800
STEELOV2.20.AC.N.4.7016	1x20W	4000K	6000	2400
STEELOV2.40.AC.N.4.7016	2x20W	4000K	6000	4800
STEELOV2.60.AC.N.4.7016	3x20W	4000K	6000	7200
STEELOV2.80.AC.N.4.7016	4x20W	4000K	6000	9600



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	AC DC	N V	P T D	3 4 6	XX XX	XX XX