

AURA Z

LED pendant type

Linear LED lighting fixture

- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts




PRODUCT CODE	W	Length	Temp	Lumen*
AURA Z.20.1000.N.4.120	20	1000	4000K	2400
AURA Z.30.1000.N.4.120	30	1000	4000K	3600
AURA Z.35.1200.N.4.120	35	1200	4000K	4200
AURA Z.40.1200.N.4.120	40	1200	4000K	4800
AURA Z.45.1500.N.4.120	45	1500	4000K	5400
AURA Z.50.1700.N.4.120	50	1700	4000K	6000

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

TECHNICAL DRAWINGS

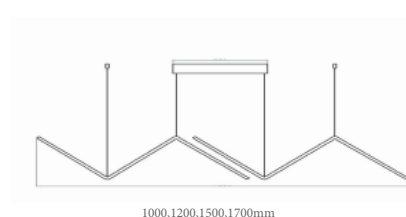


BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 120°
●	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20C°/+40C° Temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	○	W	E



* For different options, please contact our team.