



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors

ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 3000K,4000K,6500K
	Light Beam 16°,24°,46°,74°
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen
ECCO.10.Ø147.N.4.16	10	87	Ø147	Ø130	4000K	1320
ECCO.15.Ø147.N.4.16	15	87	Ø147	Ø130	4000K	1980
ECCO.20.Ø147.N.4.16	20	87	Ø147	Ø130	4000K	2640
ECCO.10.Ø147.N.4.24	10	87	Ø147	Ø130	4000K	1310
ECCO.15.Ø147.N.4.24	15	87	Ø147	Ø130	4000K	1965
ECCO.20.Ø147.N.4.24	20	87	Ø147	Ø130	4000K	2620
ECCO.10.Ø147.N.4.46	10	87	Ø147	Ø130	4000K	1300
ECCO.15.Ø147.N.4.46	15	87	Ø147	Ø130	4000K	1950
ECCO.20.Ø147.N.4.46	20	87	Ø147	Ø130	4000K	2600
ECCO.10.Ø147.N.4.74	10	87	Ø147	Ø130	4000K	1290
ECCO.15.Ø147.N.4.74	15	87	Ø147	Ø130	4000K	1935
ECCO.20.Ø147.N.4.74	20	87	Ø147	Ø130	4000K	2580

CUSTOMIZE OPTIONS



Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	single	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

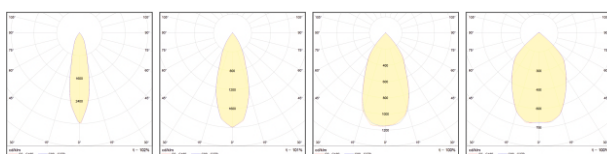

* For different options, please contact our team.