

SPACE



Surface&Pendant type

decorative lighting

Aluminum extruded body

UV protected diffuser Adjustable

length steel ropes Nickel plated



brass parts Constant current LED

driver Electrostatic powder coating

paint Production in different

lengths Optional body colors

ENEC standards

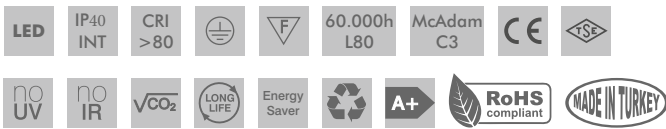

BASIC OPTIONS


on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 120°
	Operating Temperature : -20 / 40 °C
B	Black Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
SPACE.35.400.N.4.120	35	400	4000K	4200
SPACE.40.400.N.4.120	40	400	4000K	4800
SPACE.55.600.N.4.120	55	600	4000K	6600
SPACE.60.600.N.4.120	60	600	4000K	7200
SPACE.70.700.N.4.120	70	700	4000K	9000


* According to 4000K light temperature
* For different options, please contact our team.

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E	M



TECHNICAL DRAWINGS



PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX