

LED Acoustic/Pendant type

LED lighting fixture

Aluminum extruded Body

Adjustable length steel ropes

Constant current LED driver

Electrostatic powder coating paint



Production in different lengths

Optional Body Colors

ENEC Standards,




BASIC OPTIONS


on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC - 50/60 Hz 5
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 100°
	Black Body Color
B	-20C°/+40C° Temperature

PRODUCT CODE	W	Length	Temp	Lumen*
JAZZ.20.1600.N.4.100	20	1600	4000K	1680
JAZZ.25.1600.N.4.100	25	1600	4000K	2100
JAZZ.30.1600.N.4.100	30	1600	4000K	2520
JAZZ.35.1600.N.4.100	35	1600	4000K	2940
JAZZ.40.1600.N.4.100	40	1600	4000K	3360


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90		W	E



PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

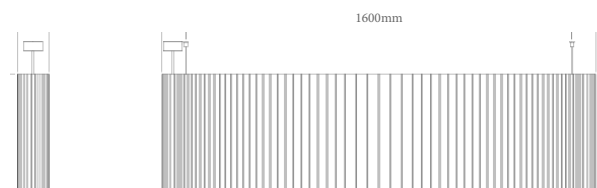

* For different options, please contact our team.