


MINI CASUAL L

LED Pole Type

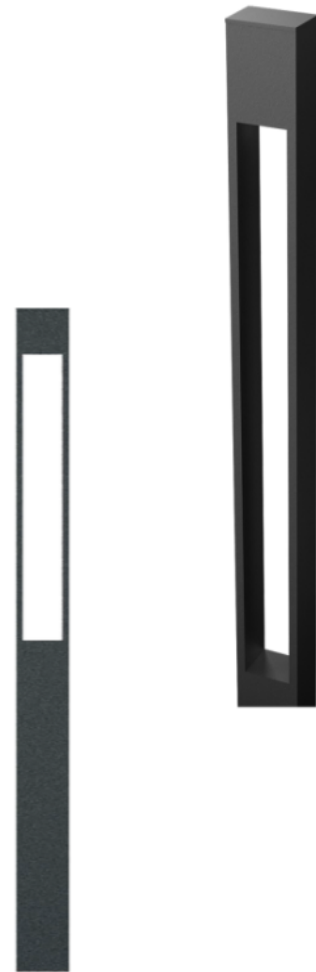

The MINI CASUAL L's soft light creates strikingly beautiful light patterns and reveals stylistic ,essenfi which bewitches both owner and spectator. Thanks to MINI CASUAL L, areas can tell stories.

This almost magic effect is due to a very pragmatic approach, namely that extraordinary performance creates extraordinary effects. Its Contemporary design is perfect for enhancing residential and urban areas featuring a modern,

Contemporary design. It creates a direct light beam, thanks to its monodirectional optics, able to enhance a precise area or subject, without glare.

MINI CASUAL L have options with power LED and LED Bulbs. Opal and Opaque diffuser is giving elegant design options.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

UV Resistant PMMA Diffuser

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- Modern decorative design
- Can be easily integrated to many designs
- Economic and tneicfife
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output
- Adjustable cable

Applications



Exterior



Facade



Architectural



Ancient

MINI CASUAL L




Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	9016 White
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	1.20 kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clear
Diffuser	Transparent & Opal & Opac


Light Colors



Ordering Details


Product Code	Power	Light Color	Dimension	Lumen
MINI CASUAL L.15.3000.AC.N.4.SYM.7016	15W	4000K	3000	1770
MINI CASUAL L.20.3000.AC.N.4.SYM.7016	20W	4000K	3000	2360
MINI CASUAL L.25.3000.AC.N.4.SYM.7016	25W	4000K	3000	2950
MINI CASUAL L.30.3000.AC.N.4.SYM.7016	30W	4000K	3000	3540
MINI CASUAL L.35.3000.AC.N.4.SYM.7016	35W	4000K	3000	4130
MIN CASUAL L.40.3000.AC.N.4.SYM.7016	40W	4000K	3000	4720
MIN CASUAL L.45.3000.AC.N.4.SYM.7016	45W	4000K	3000	5310

Body Colors Options

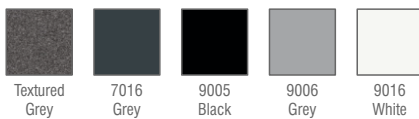

* For different options, please contact our team.

Beam Angle Options

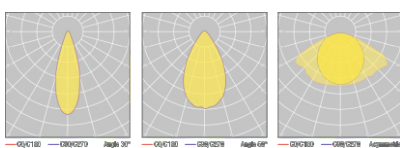

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC N V P T D				