



CESAR SS MONOCOLOR

Linear LED Wallwasher
Surface Mounted Facade Lighting

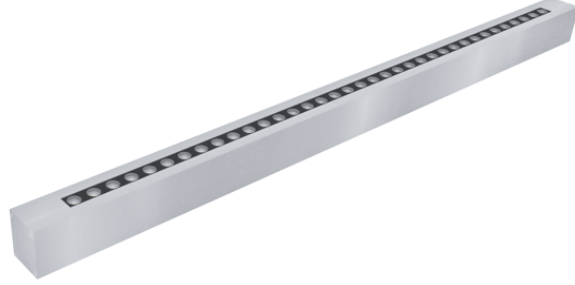

Cesar SS Monocolour exterior wallwasher luminarie is mainly used wall washing, spot lighting and flood lighting. Continuous interconnection with IP68 connectors Mounting bracket made of stainless steel.

Stainless steel body with stainless steel end caps offering various installation types. It is available as dimming options and many customizations options.

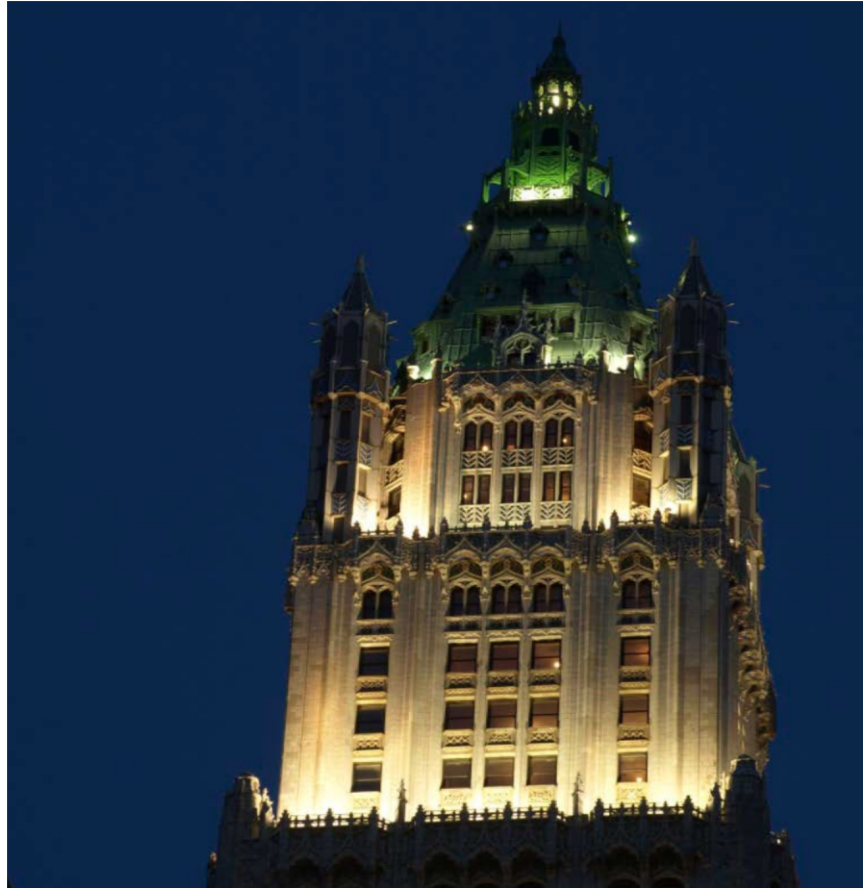

CESAR SS MONOCOLOR

Linear LED Wallwasher
Surface Mounted Facade Lighting

Basic Options

Light Source	High Power LED
Light Source Color	4000K
Control Interface	On / Off
Protection Class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
L 70	> 60 000 Hours
MacAdams	3 Step MacAdams
Ambient Temperature	-25°C to +60°C
CRI	>80

Electrical Options

Input Voltage	240V/AC
Input Frequency	50-60Hz
Electrical Protection Class	Class I

Body Options

Housing	316 Stainless Steel
Gasket	Silicone
Protection Rating	IP68
Impact Resistance	IK09
Color	Grey
Dimensions (LxWxH)	320-1520x50x60
Screws	316 Stainless Steel
End Caps	Aluminium Extrusion

Optics


Light Distribution	30°/60°/90°/120°/Asm
--------------------	----------------------

Connection

Connection Cable	5 pins circular
------------------	-----------------

Customized Options

Power	8W - 57W ± %5
Led Qty	8 / 16 / 24 / 36 / 40
Input Voltage	24V/DC
CRI	>90 (Optional)
Light Color	Red, Green, Blue, Amber
Control	1-10V, DIM, DALI

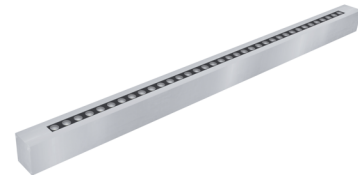

CESAR SS MONOCOLOR

Linear LED Wallwasher
Surface Mounted Facade Lighting


Ordering Details

Product Code	Input	Power	Light Color	Length	Lumen
CesarSS.MC.8.328.N.4.XX	220V/AC	8W	4000K	328mm	1200
CesarSS.MC.12.328.N.4.XX	220V/AC	12W	4000K	328mm	1800
CesarSS.MC.16.628.N.4.XX	220V/AC	16W	4000K	628mm	2400
CesarSS.MC.24.628.N.4.XX	220V/AC	24W	4000K	628mm	3600
CesarSS.MC.27.1000.N.4.XX	220V/AC	27W	4000K	1000mm	4050
CesarSS.MC.48.1000.N.4.XX	220V/AC	48W	4000K	1000mm	7200
CesarSS.MC.36.1228.N.4.XX	220V/AC	36W	4000K	1228mm	5400
CesarSS.MC.54.1228.N.4.XX	220V/AC	54W	4000K	1228mm	8100
CesarSS.MC.40.1520.N.4.XX	220V/AC	40W	4000K	1520mm	6000
CesarSS.MC.54.1520.N.4.XX	220V/AC	54W	4000K	1520mm	8100

Product Coding

Product Name	Product Power	Product Size	Control System	Color	Light Beam
XX	XX	XX	DMX	RGB	XX
XX	XX	XX	D	RGBW	XX

Technical Drawing

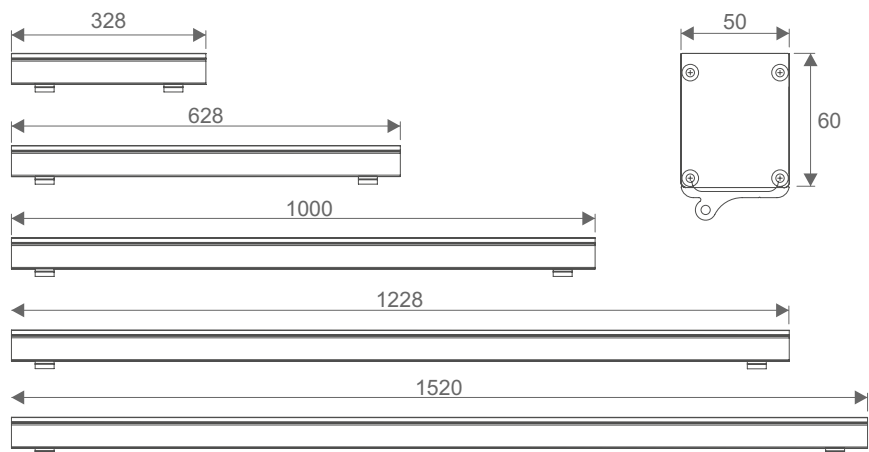

Connection Diagram

