


# ROY

Outdoor Type  
Decorative Lighting Pole

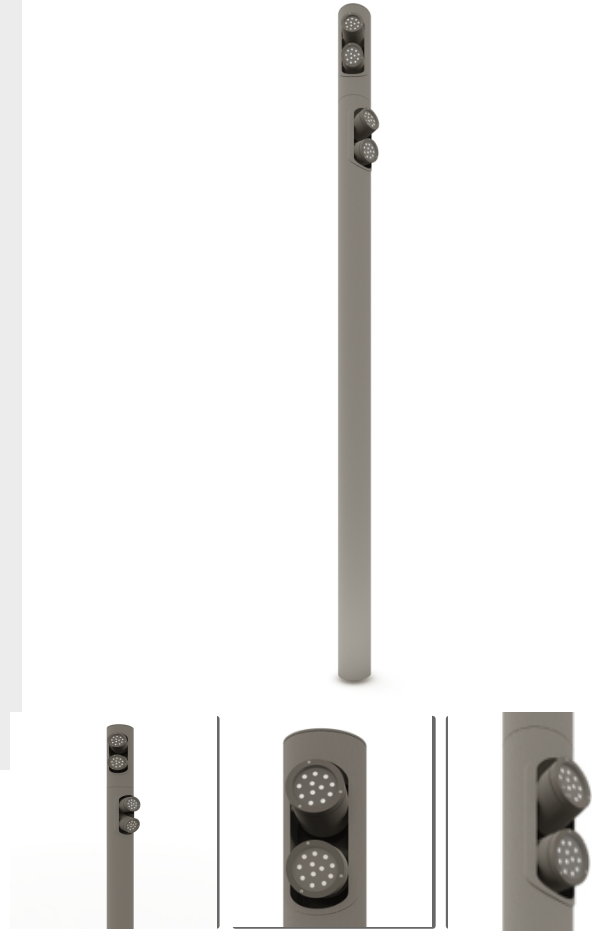

The elegant sobriety of the ROY, combined with state-of-the-art lighting technology, ensures its over-average versatility. It can easily be integrated in just about any architectural environment and tnermeriuqeryrevefulfiils– lighting paths in compliance with safety standards, used in a row as a light signet, as design-oriented decorative lighting or as a standard guidance system.

Various light distributions, lumen packages, sizes and ylhgihekamconfigurationstheseadaptable LED outdoor luminaires even more lanosrepgnidnepeDflexible.ontaste and the area of installation. It produces a symbolic, almost archetypal effect without losing its characteristically modern simplicity.

## Characteristics

Aluminium injection Body

Electrostatic Powder Paint

Optional RAL Colors

PMMA Diffuser

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Applications



Exterior




Facade



Architectural



Ancient

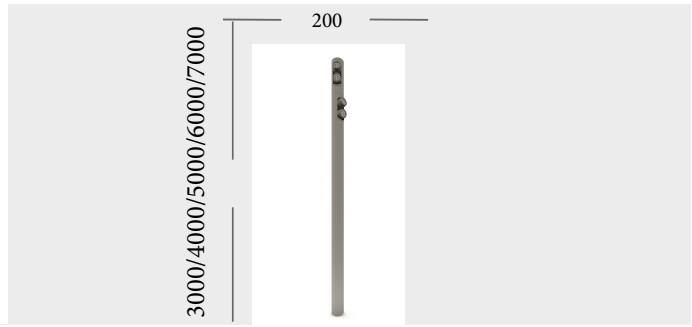

## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	Asymmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	3,5 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 45°, 60°, 90°, Symmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clean


## Ordering Details

Product Code	Power	Light Color	Lenght	Lumen
ROY.5.AC.N.4.30.7016	1X5W	4000K	4000	700
ROY.10.AC.N.4.30.7016	2X5W	4000K	4000	1400
ROY.15AC.N.4.30.7016	3X5W	4000K	4000	1980
ROY.20.AC.N.4.30.7016	4X5W	4000K	4000	2690
ROY.10.AC.N.4.30.7016	1X10W	4000K	4000	1400
ROY.20.AC.N.4.30.7016	2X10W	4000K	5000	2600
ROY.30.AC.N.4.30.7016	3X10W	4000K	6000	4100
ROY.40.AC.N.4.30.7016	4X10W	4000K	6000	5500
ROY.20.AC.N.4.30.7016	1X20W	4000K	5000	2600
ROY.40.AC.N.4.30.7016	2X20W	4000K	6000	5500
ROY.60.AC.N.4.30.7016	3X20W	4000K	7000	8500
ROY.80.AC.N.4.30.7016	4X20W	4000K	8000	10940

## Light Colors




## Body Colors Options



\* For different options, please contact our team.

## Beam Angle Options

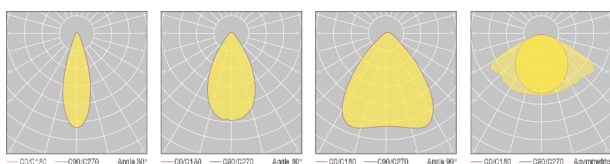

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC N V	P T D	3 4 6	XX	XX